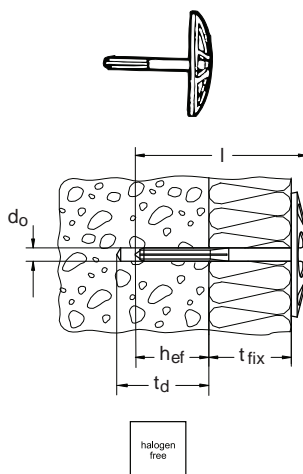







Insulation supports

R264 - article/Support type	Dimensions	40	60	80
88514 DHK  disc Ø 90 for soft insulation	d_0	8	8	8
	t_d	30	30	30
	h_{ef}	20	20	20
	l	65	85	105
	t_{fix}	40	60	80
	building materials	BN, VD, VP, BL, LP, LD		
	Dimensions	100	120	140
	d_0	8	8	8
	t_d	30	30	30
	h_{ef}	20	20	20
l	125	145	165	
t_{fix}	100	120	140	
building materials	BN, VD, VP, BL, LP, LD			

R264 - article/Support type	Dimensions	90/4	90/8
88580 DT 	disc Ø	90	90
	disc height	7	7
	d_t	4	8

Electrical fixings

R264 - article/Fixing type	Dimensions	6 - 9	9 - 12	12 - 16	16 - 20
88558 FC  halogen free	$d_{min.} - d_{max.}$	6 - 9	9 - 12	12 - 16	16 - 20

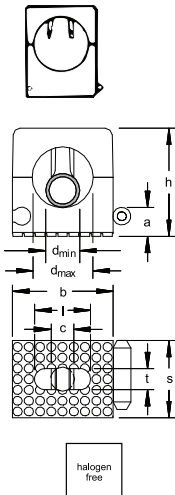R264 - article/Fixing type	Dimensions	812 **	1216 **	1619 **	
88559 SCH  * only available in white ** available in grey or white	h	23.1	28.7	37.6	
	b	21.5	27.5	32.5	
	s	16.5	16.5	16.5	
	a	6.1	6.7	8.0	
	l	12	16	18	
	t	4.5	4.5	4.5	
	c	5.1	5.1	5.1	
	$d_{min.} - d_{max.}$ for WICU pipes	8 - 12	12 - 16	16 - 19	
			22 x 1 - 22 x 1.5	10 x 1 - 12 x 1	-
	Dimensions	1623 **	2332 **	3242 *	
	h	37.6	50.0	-	
	b	36.0	46.5	-	
	s	16.5	16.5	-	
	a	7.6	10.0	-	
	l	18	28	-	
t	4.5	4.5	-		
c	5.1	5.1	-		
$d_{min.} - d_{max.}$ for WICU pipes	16 - 23	23 - 32	32 - 42		
		15 x 1 - 18 x 1	22 x 1 - 22 x 1.5	22 x 1 - 22 x 1.5	

Key → TI-116, building materials → TI-109