






Types, dimensions

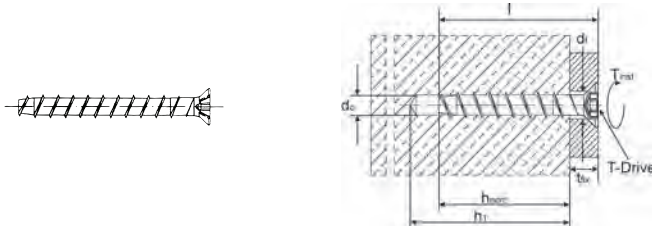

Note: When inquiring about 5 digit part numbers beginning with 8, please preface the number with R264-. Example: 88111 should be R264-88111.

R264 - article/MULTI-MONTI type									
<p>88905</p> <p>Type F Countersunk head</p>     									
$\varnothing \times l$	Hexalobular socket size (TORX)	Head \varnothing [mm]	Drill \varnothing d_0 [mm]	Drill depth h_1 [mm]	Anchor depth h_{nom} [mm]	Clamping strength t_{fix} [mm]	Admissible tension load in cracked concrete C20/25 [kN]	Admissible tension load in non-cracked concrete C20/25 [kN]	Recommended tension load in uncracked concrete C20/25 ¹⁾ [kN]
5 x 30 ¹⁾	T-25	8.7	4	35	30	1	-	-	1.9
5 x 40 ¹⁾	T-25	8.7	4	40	35	5	-	-	2.6
5 x 50 ¹⁾	T-25	8.7	4	40	35	15	-	-	2.6
5 x 60 ¹⁾	T-30	8.7	4	40	35	25	-	-	2.6
6 x 40 ¹⁾	T-30	11	5	35	30	10	-	-	1.9
6 x 50	T-30	11	5	55	45	5	0.3 ²⁾	1.5 ²⁾	3.8
6 x 60	T-30	11	5	55	45	15	0.3 ²⁾	1.5 ²⁾	3.8
6 x 80	T-30	11	5	55	45	35	0.3 ²⁾	1.5 ²⁾	3.8
6 x 100	T-30	11	5	55	45	55	0.3 ²⁾	1.5 ²⁾	3.8
6 x 120	T-30	11	5	55	45	75	0.3 ²⁾	1.5 ²⁾	3.8
6 x 140	T-30	11	5	55	45	95	0.3 ²⁾	1.5 ²⁾	3.8
7.5 x 50	T-40	13.6	6	55	45	5	0.5 ²⁾	2.0 ²⁾	3.7
7.5 x 60	T-40	13.6	6	65	55	5	2.0 ³⁾	3.1 ³⁾	5.3
7.5 x 80	T-40	13.6	6	65	55	25	2.0 ³⁾	3.1 ³⁾	5.3
7.5 x 100	T-40	13.6	6	65	55	45	2.0 ³⁾	3.1 ³⁾	5.3
7.5 x 120	T-40	13.6	6	65	55	65	2.0 ³⁾	3.1 ³⁾	5.3
7.5 x 140	T-40	13.6	6	65	55	85	2.0 ³⁾	3.1 ³⁾	5.3
7.5 x 160	T-40	13.6	6	65	55	105	2.0 ³⁾	3.1 ³⁾	5.3

1) = not a component of the approvals 2) = in acc. with DIBt approval no. Z-21.1-1503 3) = in acc. with ETA 05/0010 4) = manufacturer specification for use without approval

MULTI-MONTI = Innovative fixing elements of assembly system