


# A2

Socket head cap screws  
with low head, stainless steel  
with pilot recess

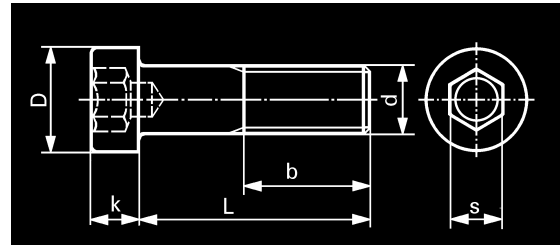


## DIN 6912

d	M4		M5		M6		M8		
D	7		8,5		10		13		
b	14		16		18		22		
k	2,8		3,5		4		5		
s	3		4		5		6		
L	quantity	100	1000	100	1000	100	1000	100	1000
8		46.50	35.50						
10		47.-	36.-	65.50	47.-				
12		49.50	38.55	67.-	48.50	72.-	51.-	124.-	93.-
16		49.80	38.80	52.50	41.-	65.-	46.50	121.-	89.-
20		50.-	39.10	55.-	43.20	68.-	48.-	113.-	83.50
25				60.50	47.55	75.-	53.-	108.-	80.-
30				70.-	50.-	79.50	59.-	113.50	84.-
35				75.50	53.50	87.50	67.-	124.-	91.-
40				82.-	59.-	99.50	73.50	137.-	101.-
45				93.50	71.-	118.-	87.50	159.-	118.-
50				106.-	85.-	130.-	96.50	178.-	131.-
60						165.-	129.-		
Reduced tightening and loads: refer to page T 25									

----- Above dash-line: fully threaded

# A2

Socket head cap screws  
with low head, stainless steel  
with pilot recess

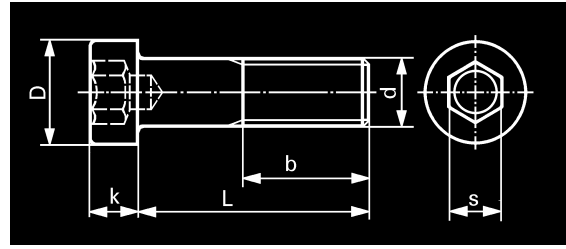

## DIN 6912

d	M 10		M 12	
D	16		18	
b	26		30	
k	6,5		7,5	
s	8		10	
L quantity	100	1000	100	1000
16	202.-	167.-		
20	179.-	139.-		
25	210.-	171.-	270.-	210.-
30	225.-	186.-	276.-	214.-
35	235.-	196.-	298.-	231.-
40	260.-	218.-	308.-	239.-
45	275.-	229.-	364.-	282.-
50	290.-	244.-	372.-	290.-
70	382.-	316.-		
Reduced tightening and loads:				

----- Above dash-line: fully threaded  
Additional sizes see A4: page C 97