


# HRC 60

Dowel pins, steel, hardened and ground

ISO 8734 A / DIN 6325 Tol. m6




Tolerance h6: 15% surcharge

d	1		1,5		2		2,5		
c	0,5		0,6		0,8		1		
L	quantity	100	1000	100	1000	100	1000	100	1000
4		13.-	6.90			14.-	8.40		
5		17.50	10.10	13.80	10.60	14.-	8.40		
6		18.50	10.80	14.50	11.50	14.-	8.40	14.50	11.50
8		20.50	11.80	14.-	11.20	14.80	8.80	15.50	12.40
10		21.-	12.60	14.50	11.50	15.10	9.-	16.60	13.30
12		23.-	13.70	15.10	12.10	15.20	9.10	18.50	14.80
14				15.90	12.80	15.50	9.40	19.10	15.30
16				17.10	13.60	15.90	9.80	20.75	16.50
18				19.90	15.70	17.30	10.60	19.60	15.60
20						17.50	10.80	20.50	16.30
22						18.-	11.30	25.50	21.25
24						20.80	12.15	20.75	16.50
28						26.25	15.80	28.-	20.50
30								30.10	21.75
32								32.50	25.50

# HRC 60

Dowel pins, steel, hardened and ground




ISO 8734 A / DIN 6325 Tol. m6

Tolerance h6: 15% surcharge

d	3		4		5		6		
c	1,2		1,4		1,7		2,1		
L	quantity	100	1000	100	1000	100	1000	100	1000
6		12.-	7.-	16.30	12.60				
8		12.-	7.-	16.30	12.60	23.-	18.40		
10		13.30	7.60	15.10	12.10	18.90	15.10	26.75	22.-
12		13.70	8.20	15.90	12.70	21.-	16.80	26.75	22.-
14		14.80	8.60	19.10	13.60	22.25	17.80	25.75	20.50
16		15.90	9.50	18.10	14.50	24.-	19.10	28.50	23.50
18		17.10	10.10	19.40	15.40	25.75	20.50	30.25	25.25
20		17.80	10.40	20.50	16.10	26.75	21.25	31.50	26.25
22		19.60	11.30	30.50	19.30	33.25	27.25	36.50	30.50
24		19.80	11.80	28.60	17.40	28.50	23.50	36.50	30.-
26		25.50	15.10	28.75	17.50	32.-	26.25	38.-	31.50
28		22.50	13.40	29.50	18.30	31.50	26.25	38.50	32.25
30		23.10	13.95	30.50	21.60	33.25	27.25	39.25	32.75
32		25.-	15.50	36.50	24.70	32.25	26.75	42.50	35.25
34						33.70	28.30	43.50	38.25
36		31.20	17.45	37.50	26.80	35.25	29.50	43.50	36.-
40				41.10	29.50	38.50	32.25	49.-	40.50
45				46.50	34.40	42.-	34.75	50.-	42.-
50						43.50	36.-	51.-	42.50
55								57.50	48.-
60						58.00	48.50	61.50	51.50
65								82.-	68.50
70								82.50	69.50
80								98.-	80.-
90								115.-	87.50
100								154.-	115.-

# HRC 60

Dowel pins, steel, hardened and ground




## ISO 8734 A / DIN 6325 Tol. m6

Tolerance h6: 15% surcharge

d	8		10		12	14	16	20
c	2,6		3		3,8	3,8	4,6	6
L	quantity	100	1000	100	1000	100	100	100
10		55.-	47.50					
12		49.-	43.-					
14		52.-	45.-					
16		47.-	39.-	78.50	68.-			
18		54.-	45.-	79.-	68.50			
20		54.50	45.50	71.50	45.-			
22		55.50	46.-	74.-	48.-			
24		53.-	44.-	75.50	48.50	125.-		
26		57.50	48.-	76.-	50.-			
28		59.-	49.50	85.-	53.50	128.-		
30		62.50	52.-	86.50	55.50	131.-	211.-	
32		63.50	55.-	92.-	59.-	134.-		
(34)		75.-	67.40			171.-		
36		61.50	51.-	99.-	65.-	165.-	240.-	
40		67.-	58.50	100.-	65.50	166.-	256.-	290.-
45		75.-	64.50	101.-	66.50	175.-	276.-	322.-
50		81.50	70.50	108.-	74.-	184.-	298.-	260.-
55		94.50	82.50	115.-	85.50	191.-	298.-	310.-
60		96.-	83.50	131.-	89.50	185.-	306.-	335.-
65		106.-	92.-					365.-
70		106.-	92.-	146.-	99.-	229.-		443.-
80		120.-	104.-	184.-	125.-	244.-	384.-	450.-
90		147.-	116.-	191.-	135.-	316.-	435.-	495.-
100		163.-	129.-	228.-	151.-	322.-	515.-	510.-
120		200.-	175.-	302.-	268.-	431.-	580.-	550.-

# HRC 60

Dowel pins, steel, hardened and ground with internal thread



ISO 8735 A / DIN 7979 D Tol. m6

d	m6	6	8	10	12	16	20	
c	≈	2,1	2,6	3	3,8	4,6	6	
d2		M 4	M 5	M 6	M 6	M 8	M 10	
b		6	8	10	12	16	18	
t	min.	10	12	16	20	25	28	
L	quantity	100-	100-	100-	100-	100-	100-	
16		62.-						
18		63.50						
20		65.50	71.-					
24		67.-	78.-	87.-				
28		68.50	88.-	91.50	151.-			
32		72.50	103.-	104.-	126.-			
36		78.-	107.-	115.-	139.-			
40		81.-	110.-	120.-	174.-	252.-		
50		88.-	124.-	138.-	203.-	320.-	390.-	
60		104.-	129.-	159.-	231.-	392.-	470.-	
70			139.-	175.-	244.-	400.-	505.-	
80			150.-	181.-	258.-	430.-	585.-	
90				198.-	270.-	470.-	605.-	
100					290.-	515.-	640.-	
120					324.-	560.-	955.-	

- Order quantity below 100 pieces 35% surcharge


**Maryland Metrics Fastener Catalog - Chapter J** Owings Mills, MD 21117 USA

phones: (410)358-3130 (800)638-1830 faxes: (410)358-3142 (800)872-9329 e-mail: techinfo@mdmetric.com  
copyright 2003 maryland metrics/kyburz ch

# HRC 60

Taper pins, steel, hardened and ground

ISO 2339 A / SN 212770 A



Taper 1:50


DIN 1

d	h10	3		4		5		6	
a	≈	0,4		0,5		0,63		0,8	
L	quantity	100	1000	100	1000	100	1000	100	1000
12		43.50	30.75						
16		45.30	31.50	51.-	37.75				
(18)				51.50	38.25				
20		46.-	32.25	53.-	39.25	62.-	46.-	102.-	73.-
(22)		47.50	32.75						
24		48.50	33.50	54.50	40.-				
(25)				69.50	54.-				
26		49.50	34.50						
30				58.-	43.-	72.20	53.10	114.-	82.-
(32)						74.50	54.50		
35		55.50	39.60			76.20	55.40	120.-	90.-
40		56.50	40.70	64.-	51.10	81.-	68.-	144.-	118.-
45		61.-	45.-			112.-	95.-	146.-	120.-
50				78.50	61.10	91.50	77.30	152.-	127.-
55				83.-	66.40				
60								170.-	145.-
80								228.-	196.-

# HRC 60


Taper pins, steel, hardened and ground

ISO 2339 A / SN 212770 A



d	h10	8	10
a	≈	1	1,2
L	quantity	100	100
30		167.–	236.–
40		185.–	258.–
45		191.–	278.–
50		198.–	292.–
55		210.–	
60		231.–	328.–
70		284.–	388.–
80		326.–	435.–
90		354.–	550.–
100		382.–	680.–

Hammer drive screws  
steel, case-hardened

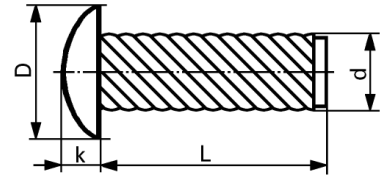

## K 860

nickel plated

d	1,47	1,85		2,49		2,89		3,5	
D ± 0,5	2,4	3,1		3,9		5,2		6,3	
k ± 0,1	0,73	1,1		1,6		2,0		2,4	
hole size	1,3	1,7		2,18		2,64		3,05	
L quantity	1000	100	1000	100	1000	100	1000	100	1000
3	4.70	5.20	3.05	5.20	3.25				
4	5.90	5.20	3.25	5.90	3.50	7.80	5.10		
6	6.50	5.70	3.40	6.20	3.75	6.80	4.15	7.80	4.50
7				7.20	4.10	6.90	4.30	9.30	5.60
9						10.20	8.40	10.80	8.75