




**ADVANCED
TECHNOLOGY
PRODUCTS**

THE MEGA HOSE BALANCER

MHB SERIES

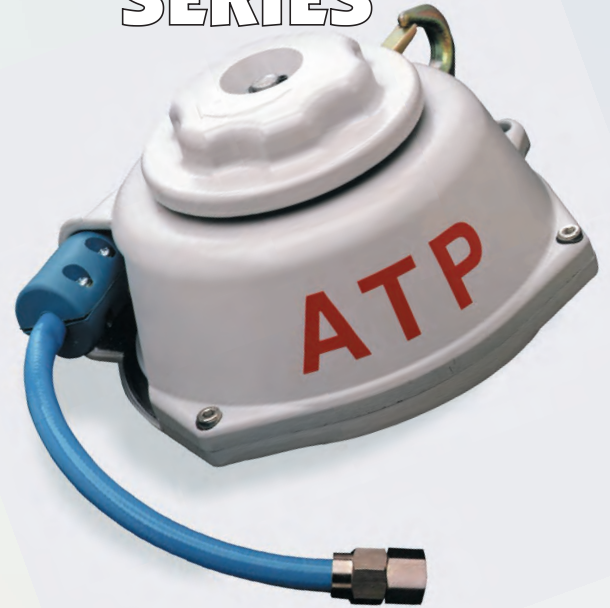

**Increase Operator Productivity & Comfort
While Reducing Damage To Air Tools**

FEATURES

The main body and dial are made of **DIE-CAST ALUMINUM** to ensure durability. The springs have been tested under a full load to **300,000 cycles**.

Lightweight and flexible 5/16" I.D. polyurethane, braided hose provides superior airflow.

Dial-type torque adjustment for easier operation than balancers requiring a key or wrench.

Four models are available with different capacities and hose lengths to suit your application.

SPECIFICATIONS

Media	Compressed Air	
Max. Working Pressure	143 PSI (1 Mpa)	
Working Temp. Range	32°—142°F (0—60°C)	
Hose	5/16" ID (8 x 10.5 mm)	
Weight	5.5 lbs. (2.5 Kg)	
Connections	1/4" NPT Fem. (Hose) 3/8" PT Male (Port)	

Model	Tool Capacity	Hose Length
MHB-83	2.2—6.6 lbs. (1—3 Kg)	50" (1.3 m)
MHB-84	2.2—6.6 lbs. (1—3 Kg)	72" (1.9 m)
MHB-85	6.6—11.0 lbs. (3—5 Kg)	40" (1.0 m)
MHB-86	6.6—11.0 lbs. (3—5 Kg)	72" (1.9 m)

The LR-09

Light-Duty Hose Balancer

**Keeps workstations clear
Reduces operator fatigue**



FEATURES

Lightweight plastic body and compact design are suitable for workstations and light-duty applications.

Dial-type torque adjustment.

Flexible polyurethane hose for ergonomic operator comfort. Two hose lengths are available. Spring guard is included.

SPECIFICATIONS

Media	Compressed Air	
Max. Working Pressure	140 PSI	
Polyurethane Hose5 x 8 mm	
Weight	1.87 lbs. (850 g)	
Connections	1/4" NPT Male	

Model	Tool Capacity	Hose Length
LR-09	3.3 lbs. (1.5 Kg)	35" (0.9 m)
LR-09B-200	3.3 lbs. (1.5 Kg)	78" (2.0 m)

WARNING: Improper selection or improper use of these products and/or systems described herein or related items can cause death, personal injury and property damage. This document and other information from ATP and our authorized distributors provide products and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the products and/or systems in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through their own analysis and testing, is solely responsible for making the final selection of the products and or/systems and assuring that all performance, safety and warning requirements of the application are met. The products are described herein, including and without limitation, product features, specifications, designs, availability and pricing, are subject to change by ATP and their authorized distributors without notice.

**ATP Products are available from
MARYLAND METRICS**

P.O. Box 261 Owings Mills, MD 21117 USA

ph: (410)358-3130 (800)638-1830

fx: (410)358-3142 (800)872-9329

email: sales@mdmetric.com

web: http:// mdmetric.com

RFQ form: http://mdmetric.com/rfq.htm

CABLE BALANCERS

FEATURES

Cable balancers enable all types of portable tools weighing up to 11 pounds (5.0 kg) to be suspended within easy reach of operators. Balancers provide the operator with a neater and safer work area, and reduce operator fatigue.

The STB series cable balancers have a heavy-duty, nylon-coated wire rope and a high-durability spring for a long service life. Both have been tested with a full load to 500,000 cycles.

The STB-50 & STB-30 use removable torque keys for tension adjustment, and the TB-15 & TB-10 have dial-type torque adjustments.

SPECIFICATIONS Click on the part number to add the item to the shopping cart.

Model	Tool Capacity	Wire Length	Balancer Weight	Body Material
STB-50	6.6 to 11.0 lbs. 3.0 to 5.0 kg	50" 1.3 m	2.9 lbs. 1.3 kg	Plastic
STB-50-2	6.6 to 11.0 lbs. 3.0 to 5.0 kg	78" 2 m	3.3 lbs. 1.5 kg	Plastic
STB-30	3.3 to 6.6 lbs. 1.5 to 3.0 kg	50" 1.3 m	2.6 lbs. 1.2 kg	Plastic
STB-30-2	3.3 to 6.6 lbs. 1.5 to 3.0 kg	78" 2 m	2.9 lbs. 1.4 kg	Plastic
TB-15	1.1 to 3.3 lbs. 0.5 to 1.5 kg	40" 1.0 m	1.4 lbs. 0.5 kg	ABS Plastic
TB-10	1.1 to 3.3 lbs. 0.5 to 1.5 kg	20" 0.5 m	0.6 lbs. 0.3 kg	ABS Plastic



HR5-315 AirHose Reel

FEATURES

Enclosed Hose Reel

Automatic hose reel. Locks and releases with a quick tug.

High quality Polypropylene material that is durable, light weight and corrosive resistant.

Supplied with wall/ceiling mount brackets.

Light weight Polyurethane hose replaces conventional rubber hose.

SPECIFICATIONS

3/8"(I.D.) X 50' Polyurethane Air Hose with 3' lead in hose

Air Hose Working Pressure: 200 PSI

Air Hose burst Pressure: 800 PSI

Inlet/Outlet: 1/4" NPT



A MEMBER OF THE GLOBAL PNEUMATIC MARKETING GROUP

ATP Products are available from **MARYLAND METRICS** P.O. Box 261 Owings Mills, MD 21117 USA
 ph: (410)358-3130 (800)638-1830 fx: (410)358-3142 (800)872-9329 email: sales@mdmetric.com web: http://mdmetric.com
 RFQ form: http://mdmetric.com/rfq.htm

How to order: Please preface each ATP part number with 'R860-' Example (using the part number): R860-PU04M/532AC