

## HSK-MINI Standard


Liquid tight nickel plated brass fittings for applications where space is limited. Typical applications:

- Machine, apparatus and plant equipment
- Measuring, control and feedback systems
- Sensors


Successfully used in all installations where a 100% reliable seal or submersible rating is required.

### HSK-MINI-M

Liquid tight strain relief fittings for the smallest cable OD

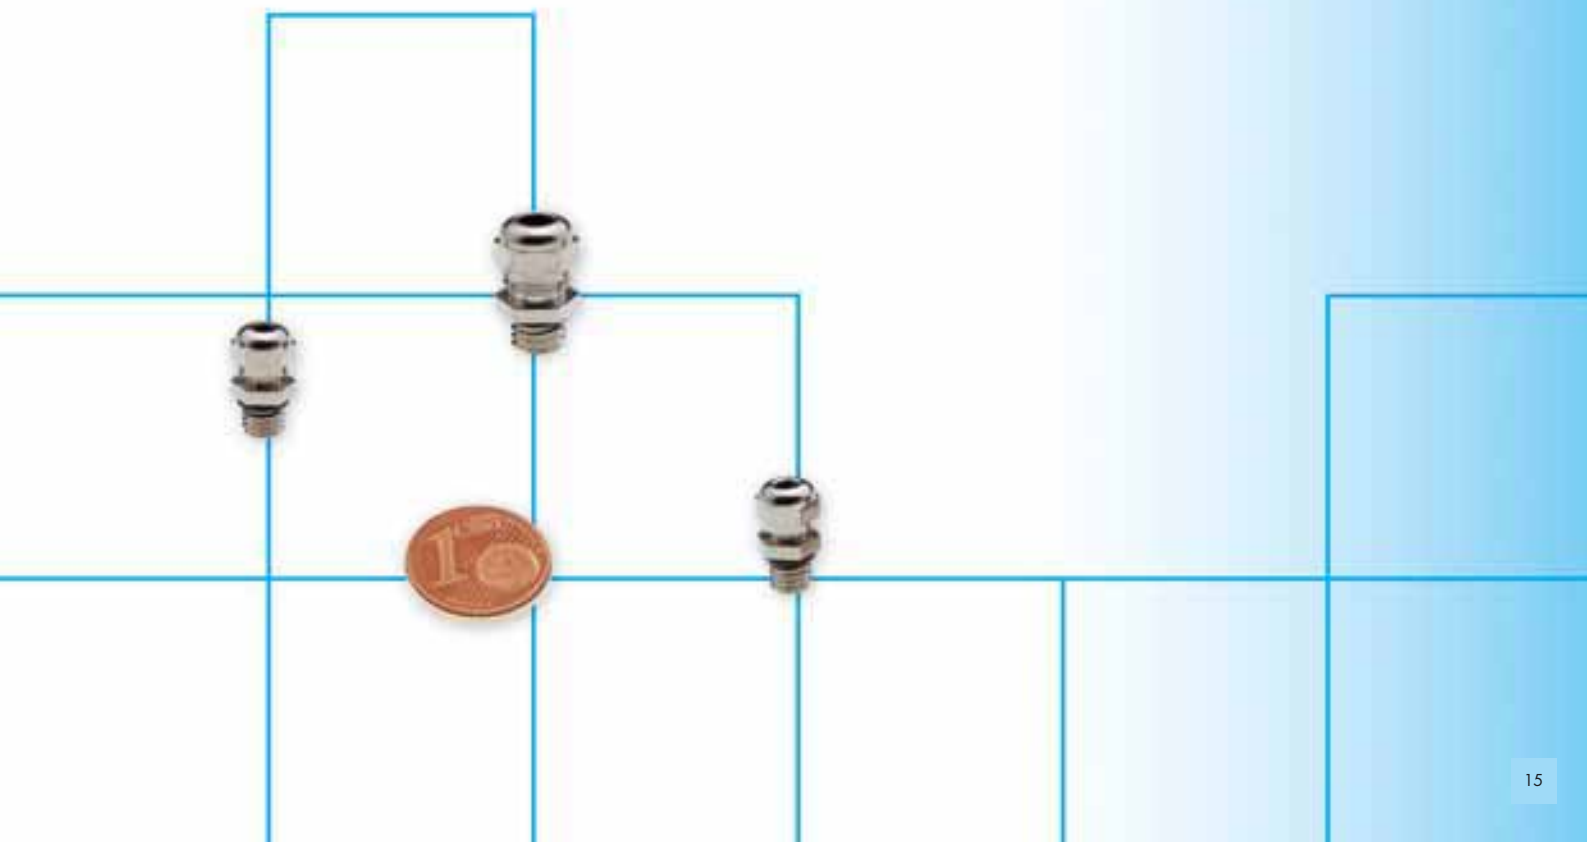




# HSK-MINI-M



Material  
Seal ring  
O-Ring  
Protection  
Operating  
Temperature

Nickel plated brass  
Buna-N (FPM)  
Buna-N (FPM)  
IP 68 (NEMA 6)  
-20 °C – 100 °C (-20 °F – 212 °F)  
-25 °C – 200 °C (FPM) (-13 °F – 392 °F)



AG	 mm	GL mm	H mm	 mm	Number Buna-N	Number FPM
M 6 x 1	2 - 3,2	6	10	8	1.106.0601.50	1.106.0600.55
M 8 x 0,75	2 - 4,5	3,5	14,3	11	1.112.0801.01	
M 8 x 1,25	3 - 5	6	13	11	1.106.0801.50	1.106.0800.55
M 10 x 1,5	4 - 6	6	14	12	1.106.1001.50	
PG 7	2 - 4,5	3,5	14,3	15/11	1.112.0708.01	

