

HUMMEL products are available from MARYLAND METRICS

P.O.Box 261 Owings Mills, MD 21117 USA

phones: (410)358-3130 (800)638-1830 faxes: (410)358-3142 (800)872-9329

email: sales@mdmetric.com web: <http://mdmetric.com>



Setting Standards

Snapflex Ex

Innovative patented conduit system for installations in hazardous locations „e“.


Snapclip DUO-Ms-Ex Combination of cable strain relief and conduit fitting for hazardous locations

Snapflex-Ex Flexible conduit for Snapclip-Duo-Ms-Ex fittings

Snapclip-Ex Snap-in mounting brackets for Snapflex conduit made of nylon, installed side by side and stacked




Snapflex-Ex/Snapclic-Ex

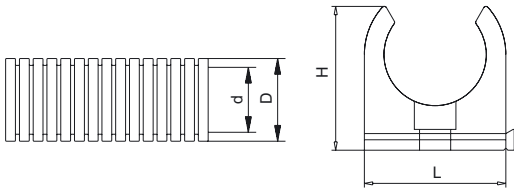

ATEX
II 2G 1D

Material PA (Nylon)
Operating Temperature -20 °C – 95 °C
(-4 °F – 203 °F)
Colors grey RAL 7031
black RAL 9005




For approvals see page 162

Size D	d mm	D mm	H mm	L mm	Number black
Snapflex-Ex					
16	10,7	16			1.560.1601.50
20	14,1	20			1.560.2001.50
25	18,3	25			1.560.2501.50
32	24,3	32			1.560.3201.50
40	31,2	40			1.560.4001.50
Snapclic-Ex					
16			25	21	1.731.1601.50
20			30	28	1.731.2001.50
25			34	34	1.731.2501.50
32			40	42	1.731.3201.50
40			50	51	1.731.4001.50




Snapclic-DUO-MS-EX

Mettr.





ATEX
II 2G 1D

Material Nickel plated brass
Clamping insert PA (Nylon)
Seal Buna-N
Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F)



NPT threads and elongated threads available upon request


For approvals see page 162

AG	GL mm	H mm	D mm	 mm	 mm	Fits Snapflex Conduit	Number
M 16 x 1,5	6	38,5	23	20	5 - 10	16	1.566.1601.50
M 16 x 1,5	6	38,5	23	20	3 - 7	16	1.566.1601.51
M 20 x 1,5	6	41,5	29	24	10 - 14	20	1.566.2001.50
M 20 x 1,5	6	41,5	29	24	7 - 12	20	1.566.2001.51
M 25 x 1,5	7	44,5	30	30	13 - 18	25	1.566.2501.50
M 25 x 1,5	7	44,5	30	30	9 - 16	25	1.566.2501.51
M 32 x 1,5	8	52,5	39	40	18 - 24	32	1.566.3201.50
M 32 x 1,5	8	52,5	39	40	13 - 20	32	1.566.3201.51
M 40 x 1,5	8	59	45	50	22 - 31	40	1.566.4001.50
M 40 x 1,5	8	59	45	50	20 - 26	40	1.566.4001.51



Snapclic-DUO-MS-Ex

PG





ATEX
II 2G 1D

Material Nickel plated brass
Clamping insert PA (Nylon)
Seal Buna-N
Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F)

RoHS

NPT threads and elongated threads available upon request

For approvals see page 162

AG	GL mm	H mm	D mm	 mm	 mm	Fits Snapflex Conduit	Number
PG 11	6	38,5	23	20	5 - 10	16	1.567.1116.01
PG 11	6	38,5	23	20	3 - 7	16	1.567.1116.15
PG 16	6	41,5	29	24	10 - 14	20	1.567.1620.01
PG 16	6	41,5	29	24	7 - 12	20	1.567.1620.15
PG 21	7	44,5	30	30	13 - 16	25	1.567.2125.01
PG 21	7	44,5	30	30	9 - 16	25	1.567.2125.15
PG 29	8	52,5	39	40	18 - 22	32	1.567.2932.01
PG 29	8	52,5	39	40	13 - 20	32	1.567.2932.15
PG 36	8	59	45	50	22 - 28	40	1.567.3640.01
PG 36	8	59	45	50	20 - 16	40	1.567.3640.15

