


# T2.5 Timing Belts



Pitch 2.5 mm (.098")

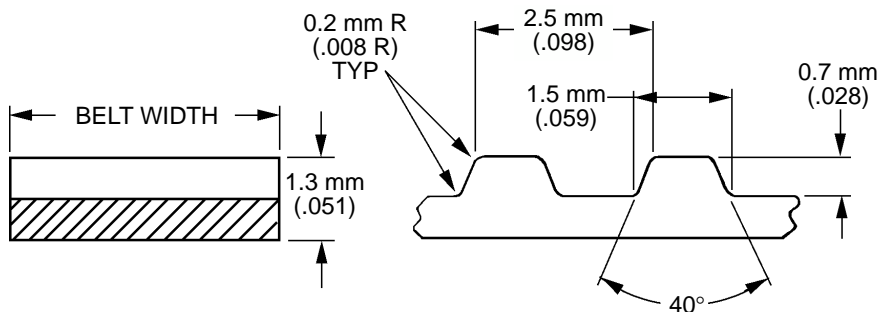

**MATERIAL:**

Nylon Covered, Fiberglass Reinforced, Neoprene

**LOADING CAPACITY:**

36 N/mm (205.6 lbf/in.) Belt Width

**BREAKING STRENGTH:**

≥46 N/mm (262.7 lbf/in.) Belt Width

**TEMPERATURE RANGE:**

-40°C to 120°C (-40°F to 248°F)

**QB-T2.5** - [ ] [ ] [ ] [ ] - [ ] [ ]

PITCH LENGTH CODE

WIDTH CODE	Belt* Width
04	4 mm (.157)
06	6 mm (.236)
10	10 mm (.394)

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
0120	120	4.724	48
0145	145	5.709	58
0160	160	6.299	64
0178	177.5	6.988	71
0200	200	7.874	80
0265	265	10.433	106
0285	285	11.220	114
0300	300	11.811	120
0318	317.5	12.500	127
0330	330	12.992	132
0335	335	13.189	134
0380	380	14.961	152
0420	420	16.535	168
0480	480	18.898	192
0500	500	19.685	200
0540	540	21.260	216
0620	620	24.409	248
0690	690	27.165	276
1095	1095	43.110	438
1128	1127.5	44.390	451

\*Special Widths - cut to size from sleeves available from stock.

**QTC, Econobelt & Zetasassi products are available from: MARYLAND METRICS**  
**P.O.Box 261 Owings Mills, MD 21117 USA E-mail: sales@mdmetric.com**  
**phones: (410)358-3130 (800)638-1830 faxes: (410)358-3142 (800)872-9329 url: http://mdmetric.com**

copyright 2003 maryland metrics/qtc/econobelt/zetasassi