


AT5 Timing Belts



Pitch 5 mm (.197")

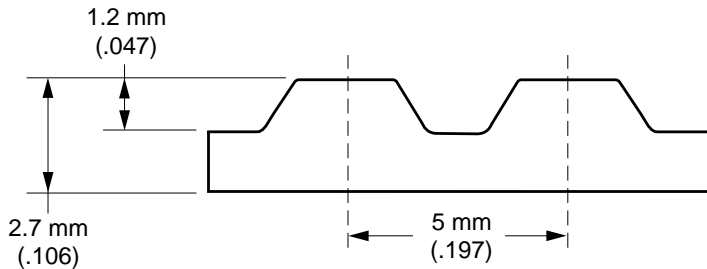

MATERIAL:

Nylon Covered, Fiberglass Reinforced, Neoprene

LOADING CAPACITY:

60 N/mm (343 lbf/in.) Belt Width

BREAKING STRENGTH:

≥80 N/mm (457 lbf/in.) Belt Width

TEMPERATURE RANGE:

-40°C to 120°C (-40°F to 248°F)

QB-AT5 - [] [] [] [] - [] []

PITCH LENGTH CODE

WIDTH CODE	Belt* Width
06	6 mm (.236)
10	10 mm (.394)
16	16 mm (.630)
25	25 mm (.984)

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
0300	300	11.811	60
0390	390	15.354	78
0600	600	23.622	120
0630	630	24.803	126
0660	660	25.984	132
0750	750	29.528	150
0975	975	38.386	195
1125	1125	44.291	225

*Special Widths - cut to size from sleeves available from stock.

QTC, Econobelt & Zetasassi products are available from: MARYLAND METRICS
P.O.Box 261 Owings Mills, MD 21117 USA E-mail: sales@mdmetric.com
phones: (410)358-3130 (800)638-1830 faxes: (410)358-3142 (800)872-9329 url: http://mdmetric.com

copyright 2003 maryland metrics/qtc/econobelt/zetasassi