


# AT10 Timing Belts



Pitch 10 mm (.394")

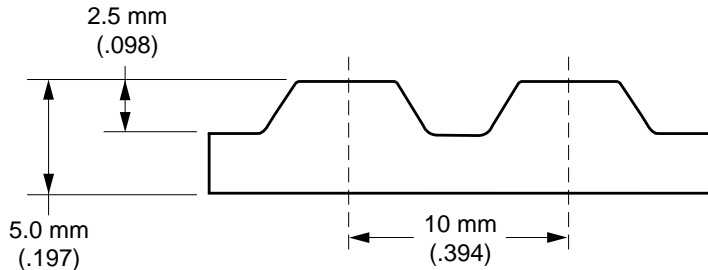

**MATERIAL:**

Nylon Covered, Fiberglass Reinforced, Neoprene

**LOADING CAPACITY:**

220 N/mm (1256 lbf/in.) Belt Width

**BREAKING STRENGTH:**

≥270 N/mm (1542 lbf/in.) Belt Width

**TEMPERATURE RANGE:**

-40°C to 120°C (-40°F to 248°F)

**QB-AT10** –     –

PITCH LENGTH CODE

WIDTH CODE	Belt* Width
16	16 mm (.630)
25	25 mm (.984)
32	32 mm (1.260)

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
0960	960	37.795	96
1010	1010	39.764	101
1150	1150	45.276	115
1210	1210	47.638	121
1250	1250	49.213	125
1280	1280	50.394	128
1800	1800	70.866	180
1940	1940	76.378	194
2000	2000	78.740	200
3150	3150	124.016	315

\*Special Widths - cut to size from sleeves available from stock.

QTC, Econobelt & Zetasassi products are available from: **MARYLAND METRICS**  
**P.O.Box 261 Owings Mills, MD 21117 USA E-mail: sales@mdmetric.com**  
**phones: (410)358-3130 (800)638-1830 faxes: (410)358-3142 (800)872-9329 url: http://mdmetric.com**  
 copyright 2003 maryland metrics/qtc/econobelt/zetasassi