



BSPT THREADED FLANGE WITH HUB

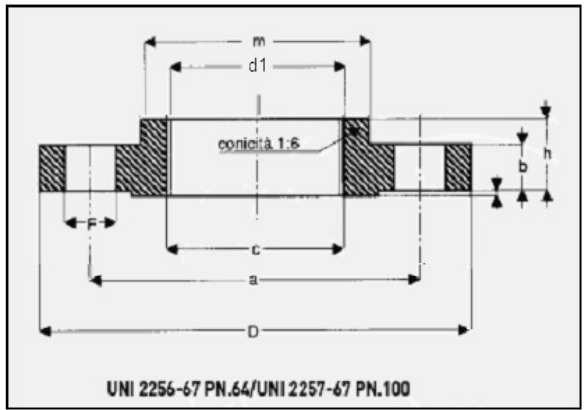

UNI 2255-67 PN 40

Ø	DN	a	D	b	d1 R	F	h	m	c	l	Bolt	# of Holes	Wt. kg
1/2"	15	65	95	16	1/2"	14	22	35	-	-	M12	4	0,80
3/4"	20	75	105	18	3/4"	14	26	45	-	-	M12	4	1,13
1"	25	85	115	18	1"	14	28	52	-	-	M12	4	1,37
1 1/4"	32	100	140	18	1 1/4"	18	30	60	-	-	M16	4	1,99
1 1/2"	40	110	150	18	1 1/2"	18	32	70	-	-	M16	4	2,35
2"	50	125	165	20	2"	18	34	85	-	-	M16	4	3,11
2 1/2"	65	145	185	22	2 1/2"	18	38	105	-	-	M16	8	4,10
3"	80	160	200	24	3"	18	40	118	-	-	M16	8	5,06
4"	100	190	235	24	4"	22	44	145	-	-	M20	8	6,81
5"	125	220	270	26	5"	25	48	170	-	-	M22	8	9,25
6"	150	250	300	28	6"	25	52	200	-	-	M22	8	12,1

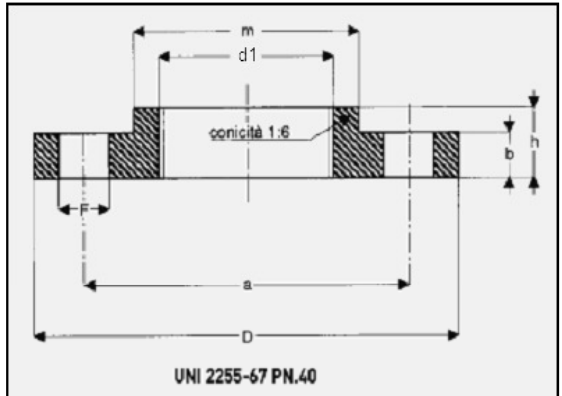

UNI 2256-67 PN 64

Ø	DN	a	D	b	d1 R	F	h	m	c	l	Bolt	# of Holes	Wt. kg
For size Ø 1/2" to Ø 1 1/2" use Flange PN 100 - UNI 2257-67													
2"	50	135	180	26	2"	22	36	90	95	3	M20	4	4,23
2 1/2"	65	160	205	26	2 1/2"	22	40	112	120	3	M20	8	5,41
3"	80	170	215	28	3"	22	44	125	130	3	M20	8	6,35
4"	100	200	250	30	4"	25	52	152	160	3	M22	8	9,18
5"	125	240	295	34	5"	30	56	185	185	3	M27	8	14,0
6"	150	280	345	36	6"	33	60	215	215	3	M30	8	20,3

UNI 2257-67 PN 100

1/2"	15	75	105	20	1/2"	14	28	43	45	2	M12	4	1,18
3/4"	20	90	130	22	3/4"	18	30	52	58	2	M16	4	1,98
1"	25	100	140	24	1"	18	32	60	65	2	M16	4	2,51
1 1/4"	32	110	155	24	1 1/4"	22	32	68	75	2	M20	4	2,97
1 1/2"	40	125	170	26	1 1/2"	22	34	80	85	3	M20	4	3,82
2"	50	145	195	28	2"	25	36	95	95	3	M22	4	5,33
2 1/2"	65	170	220	30	2 1/2"	25	40	118	120	3	M22	8	7,00
3"	80	180	230	32	3"	25	44	130	130	3	M22	8	8,10
4"	100	210	265	36	4"	30	52	158	160	3	M27	8	11,7
5"	125	250	315	40	5"	33	56	188	185	3	M30	8	18,2
6"	150	290	355	44	6"	33	60	225	215	3	M30	12	24,6