





● Steel

Countersunk head  
Round shank  
Closed



Zinktop (A)  
Zinc plated, yellow passivated (B)

UFX

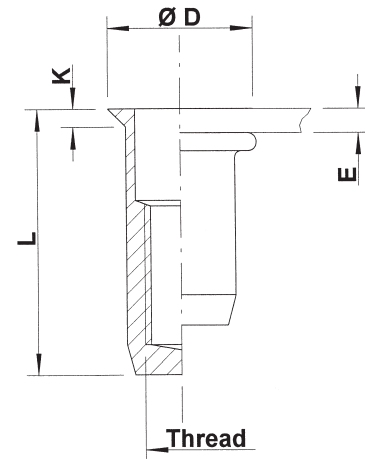

Steel

THREAD	TYPE	E = grip	L	b <sup>+0,1</sup> = drill dia	d = shank dia	D	K	kg/1000	ORDER CODE (A)	ORDER CODE (B)
M4	UFX35	1,7-3,5	15,5	6,0	6,0	9,0	1,5	2,0	524 449	524 440
	UFX50	3,5-5,0	17,0	6,0	6,0	9,0	1,5	2,2	524 469*	524 460*
M5	UFX40	1,7-4,0	18,0	7,0	7,0	10,0	1,5	3,0	525 389	525 380
	UFX65	4,0-6,5	20,5	7,0	7,0	10,0	1,5	3,4	525 409*	525 400*
M6	UFX45	1,7-4,5	22,0	9,0	9,0	12,0	1,5	6,1	526 409	526 400
	UFX65	4,5-6,5	24,0	9,0	9,0	12,0	1,5	6,5	526 429*	526 420*
M8	UFX45	1,7-4,5	25,0	11,0	11,0	14,0	1,5	9,2	528 369	528 360
	UFX65	4,5-6,5	28,0	11,0	11,0	14,0	1,5	10,1	528 389*	528 380*

\* Minimum order quantity required after depletion of stock

All dimensions in mm  
Technical data subject to modification

