



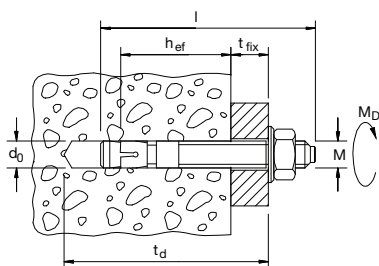

High performance steel anchors

R264 - article/Plug type	Dimensions	12/30	12/30 K	12/45+65	12/50	12/80	12/100
	d_0	12	12	12	12	12	12
	t_{fix}	30	30	45/65	50	80	100
	h_{ef}	65	50	70/50	65	65	65
	t_d	115	100	135	135	165	185
	l	126	111	143	146	176	196
	thread	M 12x79	M 12x64	M 12x103	M 12x99	M 12x129	M 12x149
	washer	24 x 2.5	24 x 2.5	24 x 2.5	24 x 2.5	24 x 2.5	24 x 2.5
	building materials	BN, VD					
	Dimensions	12/120	12/140	12/160	16/10	16/15 K	16/25
	d_0	12	12	12	16	16	16
	t_{fix}	120	140	160	10	15	25
	h_{ef}	65	65	65	64	65	80
	t_d	205	225	245	98	104	129
	l	216	236	256	109	120	145
	thread	M 12x169	M 12x189	M 12x100	M 16x54	M 16x64	M 16x89
	washer	24 x 2.5	24 x 2.5	24 x 2.5	30 x 3	30 x 3	30 x 3
	building materials	BN, VD					
	Dimensions	16/25 K	16/25+45	16/50	16/50+70	16/80	16/100
	d_0	16	16	16	16	16	16
	t_{fix}	25	25/45	50	50/70	80	100
	h_{ef}	65	84/64	80	84/64	80	80
	t_d	114	133	154	158	184	204
	l	130	144	170	169	200	220
	thread	M 16x74	M 16x89	M 16x114	M 16x114	M 16x144	M 16x164
	washer	30 x 3	30 x 3	30 x 3	30 x 3	30 x 3	30 x 3
	building materials	BN, VD					
	Dimensions	16/140	16/160	16/200	20/10 K	20/30	20/60
	d_0	16	16	16	20	20	20
	t_{fix}	140	160	200	10	30	60
	h_{ef}	80	80	80	80	105	105
	t_d	244	264	304	120	165	195
	l	260	280	320	139	184	214
	thread	M 16x100	M 16x100	M 16x100	M 20x50	M 20x90	M 20x90
	washer	30 x 3	30 x 3	30 x 3	37 x 3	37 x 3	37 x 3
	building materials	BN, VD					
	Dimensions	20/80	20/120				
	d_0	20	20				
	t_{fix}	80	120				
	h_{ef}	105	105				
	t_d	215	255				
	l	234	274				
	thread	M 20x90	M 20x90				
	washer	37 x 3	37 x 3				
	building materials	BN, VD					

88582
 FBN II
 FBN II K



K = short version
 with reduced anchor depth h_{ef}