

TUBTARA® PRODUCTS ARE AVAILABLE AT:

MARYLAND METRICS

P.O. Box 261
phones: (410)358-3130
faxes: (410)358-3142
URL: <http://mdmetric.com>

Owings Mills, MD 21117 USA
(800)638-1830
(800)872-9329
E-mail: sales@mdmetric.com

DFS 109 T

Hand tool for Blind Rivet Nuts

CAPACITY

Blind rivet nuts :
Size range from M4 to M10 in all materials
Blind rivet studs (Arbolt) :
Size range from M4 to M8 in steel

CHARACTERISTICS

- ✓ Heavy duty hand rivet nut tool for field and low volume production use.
- ✓ Featuring an exclusive quick mandrel change without tools for faster use in the field.
- ✓ Push and pull mechanism for threading on and off the blind nut.
- ✓ Unbreakable steel reinforced tool body.
- ✓ Stroke fully adjustable : 6 mm with possibilities to adjust it up to 12 mm.
- ✓ The DFS 109 T hand tool is supplied in a wooden box including the basic tool and all the components.


TECHNICAL FEATURES

Weight : 2,2 kg
Length : 52 cm
Length with draw tube pulled out : 66 cm
Width (with closed handles) : 16 cm
Width (with open handles at 6 mm stroke) : 45 cm
Stroke : 6 mm (up to 12 mm)
Total weight (with box) : 3,95 kg

EQUIPMENT

Blind rivet nuts :
Anvils and mandrels from M4 to M10
Blind rivet studs (Arbolt) :
Arbolt pullers from M5 to M8
Instruction manual with spare parts list.

 **DEJOND**
A technology in Cold Forming
Tubtara® Unigrip

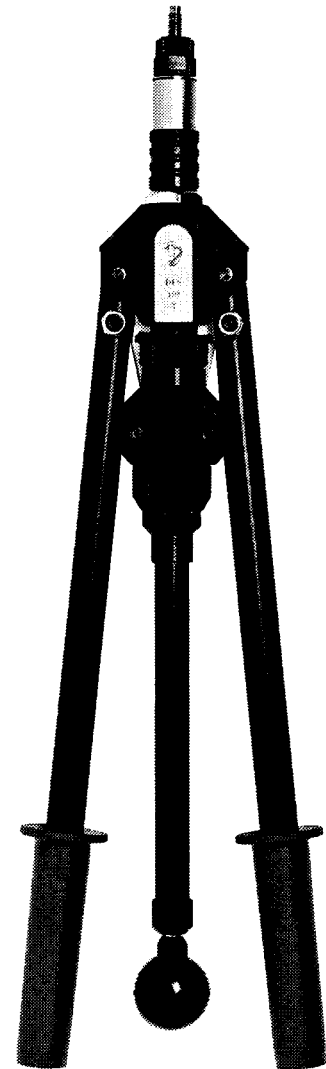

PAGE 7.4A

copyright 1999 maryland metrics